

LIFE TO BE **DELIGHTED**

Head Office:
16 Ingestre Place (First floor) London
United Kingdom W1F 0JJ

Email:
info@framtida.com

www.framtida.co.uk

 Framtida

Lighting Catalogue. 2022-2023

 Framtida



Lighting Catalogue.

SELECTED PRODUCTS FROM
2022 - 2023



Framtida is future

About Us

Framtida is Swedish, meaning "future". Product iteration and human centric design are our core values and prospects. Most of our products are inspired by life and natural scenery, apply modern technology and combined with the essence of European classic and trend product aesthetics. "**The future**" makes life more beautiful, harmonious, and makes people enjoy a more comfortable natural ambience.





Natural Angle

Precise Radial Beam Technology

Precise beam definitions
and **subtle gradations**
available **from 6° through**
to 40° make **Radius**
a high-precision
lighting tool.

Art illuminated




light is the main ingredient in art



The treatment of light to create depth and drama is a pillar of many painters and architects. The use of **Ra90+** ultra **high color display** lamps to ensure a more **perfect display** of the charm of art works.

INDEX

Track System Magnet

	MAGNETO TRACK 26A	P. 013		MAGNETO TRACK 26T	P. 015
	MAGNETO TRACK 26R	P. 017		MAGNETO TRACK 26E	P. 019
	MAGNETO SPOTLIGHT	P. 023		MAGNETO SPOTLIGHT	P. 025
	MAGNETO SPOTLIGHT	P. 027		MAGNETO SPOTLIGHT	P. 029
	MAGNETO SPOTLIGHT	P. 031		MAGNETO GRILLE	P. 033
	MAGNETO GRAPHIC	P. 035		MAGNETO SUSPENDE	P. 037
	MAGNETO SUSPENDE	P. 039		MAGNETO SUSPENDE	P. 041
	MAGNETO SUSPENDE	P. 043		MAGNETO SUSPENDE	P. 045

Ceiling & Recessed





	HELIOS IP65	P. 057		HELIOS IP65 PRO	P. 063
	GALIO	P. 069		ARTEMIS	P. 073
	REVEN II	P. 081		HADES	P. 085
	PIN	P. 087		BAI	P. 089
	BROW	P. 091		NESSO	P. 093
	STARK	P. 095		NAMI	P. 097
	DOT	P. 101		MIZ Flat	P. 105
	MIZ Mediate	P. 111		MIZ Ultra	P. 115

INDEX

Ceiling & Recessed

	LATIO Trim	P. 123		LATIO Wallwasher	P. 125
	LATIO Trimless	P. 127		LATIO Adjustable	P. 129
	MO	P. 131		WISE I	P. 137
	WISE II	P. 141		ARC	P. 149


Track

	LEVER	P. 153		PACO ZOOM	P. 165
	PACO	P. 159		REGIN	P. 183
	PLATO	P. 167		DURY	P. 187
	POLAR	P. 185		ALOS	P. 191
	HOBO	P. 189		SNAP	P. 195
	ARM	P. 193			

Track

	HAWK	P. 199		BROW TRACK	P. 201
	LATIO TRACK	P. 203			

Surface & Pendent

	TUBE	P. 209		ARIES II	P. 211
	LUMA	P. 213		LUNA	P. 215
	HYDRA	P. 217		POLE I	P. 219
	POLE II	P. 221		POLE III	P. 223

Linear

	LYNIER Reflector	P. 233		LYNIER Prismatic	P. 234
	LATIO CEILING	P. 235		EDGE	P. 239

Appearance

	AGLOS	P. 241
---	-------	--------


Magneto Track System






Application

Suitable for hotels, senior clubs, villas, offices, shopping malls and other lighting places.

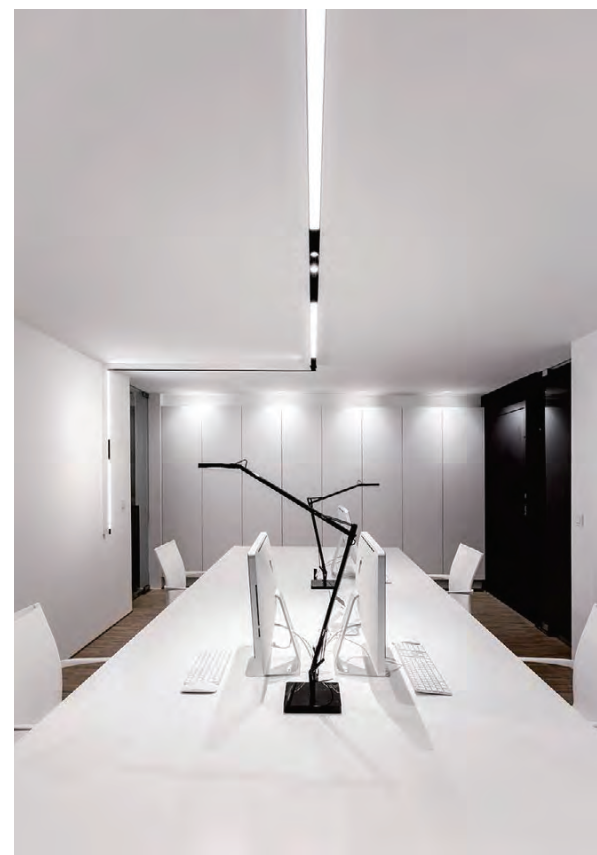

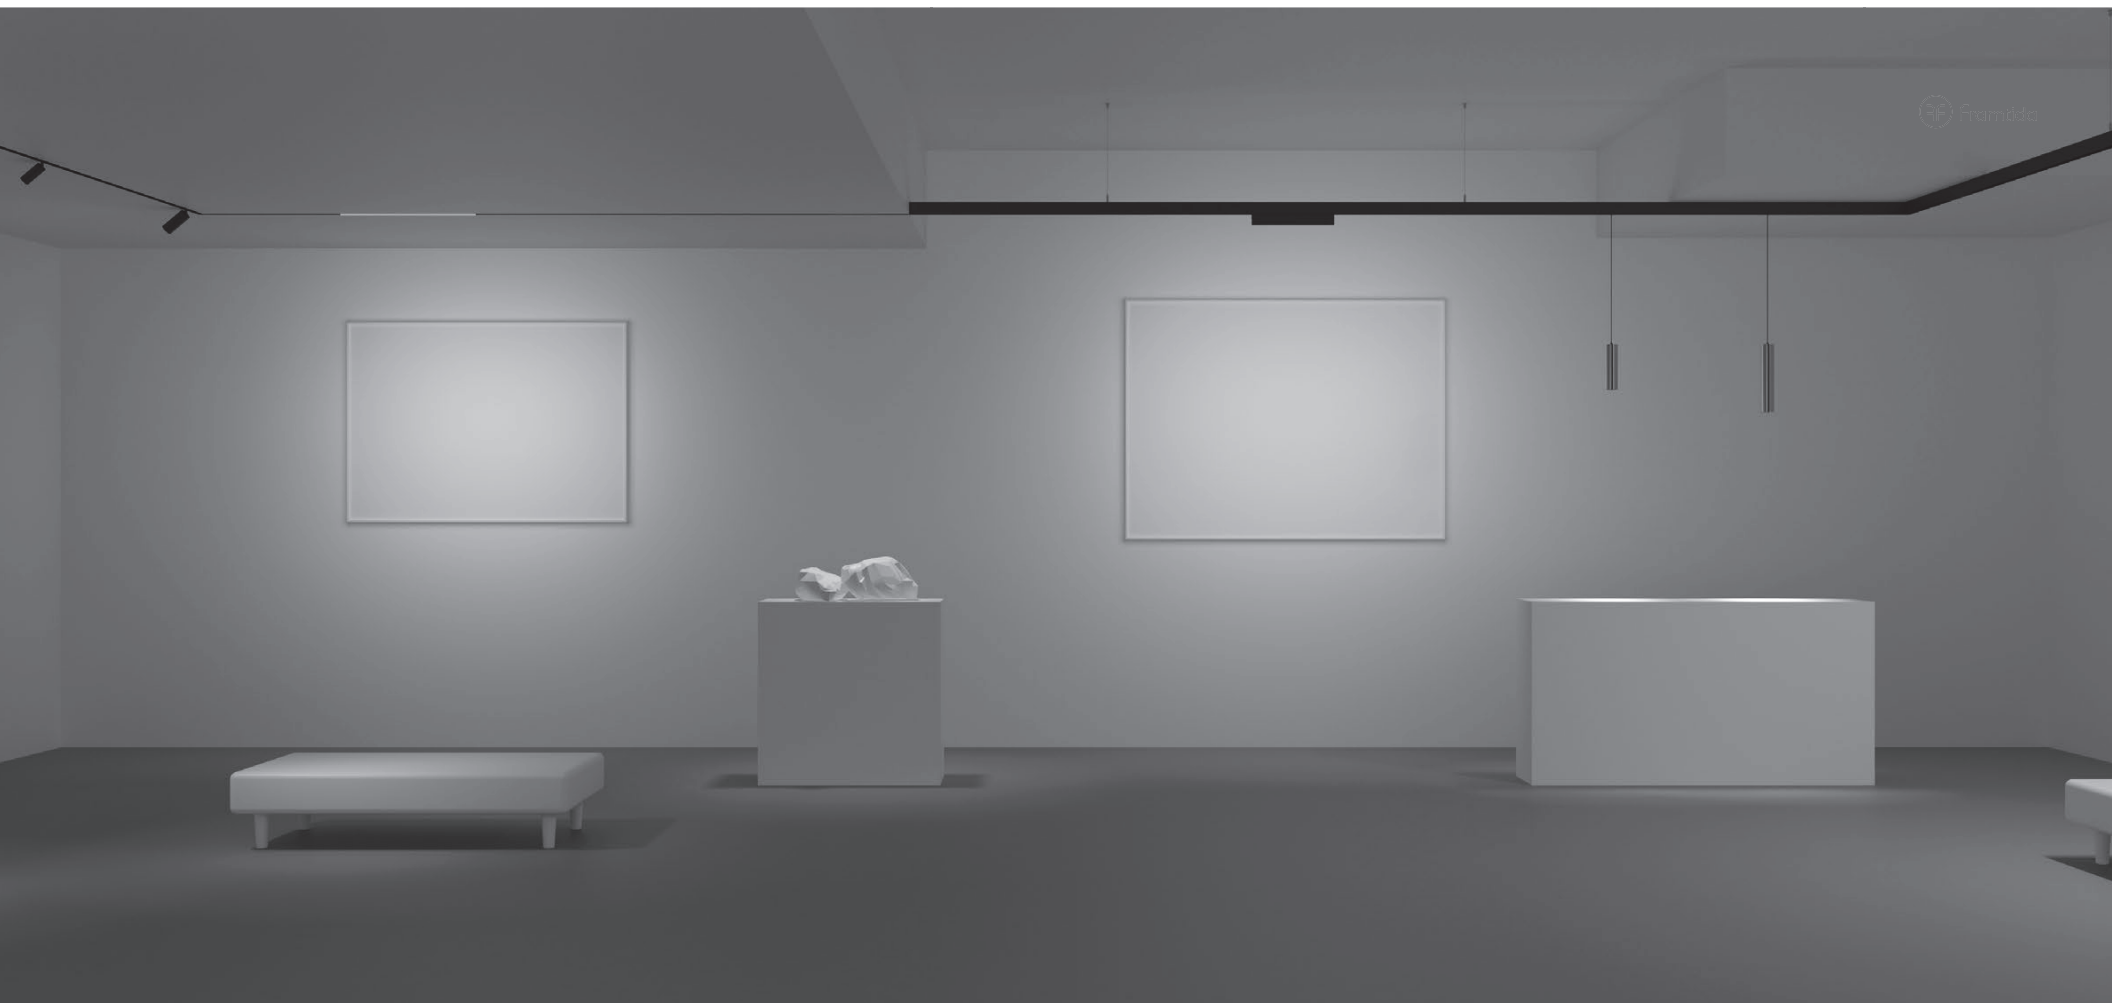

MAGNETO TRACK SYSTEM

Four kinds of deep hidden tracks can be compatible with a variety of magnetic absorption lighting products, One system, multiple lighting solutions.

Miniaturization and formal minimalism: maximum integration into the architecture. Electrical safety, low voltage Simple installation way, the lamp can move position at will, meet the modern decoration style.

MAGNETO TRACK 26A
surface

MAGNETO TRACK 26R
trim system

MAGNETO TRACK 26T
trimless system

MAGNETO TRACK 26E
trimless system

MAGNETO TRACK 26A
suspended system

ONE SYSTEM, MULTIPLE LIGHTING SOLUTIONS

Four kinds of deep hidden tracks can be compatible with a variety of magnetic absorption lighting products. One system, multiple lighting solutions. Miniaturization and formal minimalism: maximum integration into the architecture. Electrical safety, low voltage. Simple installation way, the lamp can move position at will, meet the modern decoration style.

MAGNETO TRACK 26A surface / suspended system



Length 1000-3000mm

Extruded aluminium profile with 26mm width groove; for wall-/ceiling surface mounting or suspended mounting (1500 mm cable suspension); height adjustment without tools; incl. black feed;

Designed for continuous lighting systems, 90° angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal;

surface spray powder black or white/black; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system;



MAGNETO TRACK 26T trimless system



Length 1000-3000mm

Extruded aluminium profile with 26mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness; suitable for wall or ceiling mounting;

designed for continuous lighting systems, 90° angle connectors for flexible system design;

with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system;



MAGNETO TRACK 26R trim system



Length 1000-3000mm

Extruded aluminium profile with 26mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness; suitable for wall or ceiling mounting; designed for continuous lighting systems, 90° angle connectors for flexible system design;

with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system;



MAGNETO TRACK 26E trimless system



Length 1000-3000mm

Extruded aluminium profile with 26mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness; suitable for wall or ceiling mounting;

designed for continuous lighting systems, 90° angle connectors for flexible system design;

with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system;



MAGNETO TRACK 26

LIGHT FITTINGS

MOUNTING TYPE	TRACK 26A Surface / Suspended	TRACK 26T Recessed Trimless	TRACK 26R Recessed Trim	TRACK 26E Recessed Trimless
ADAPTING PIECE	L Connector	T Connector	X Connector	
POWER FEEDER UNIT	082102.M26L01 2x2,5 mm2/2x2,5 + 2x0,5 mm2 cable length 500 mm	082102.M26L02 2x2,5 mm2/2x2,5 + 2x0,5 mm2 cable length 2000 mm		
CONNECTOR SET	082102.M26L03 linear flexible	082102.M26L04 mechanical linear connector surface+suspended		
END CAPS	082102.M26L05-A end caps (pair)	082102.M26L05-B end caps (pair)		
CEILING FASTENER	082102.M26L06 1.20mm ceiling fastener	082102.M26L07 driver box to install power supply	082102.M26L08 driver box to install power supply	
CABLE SUSPENSION	2.cable susp. (use every 2000 mm)			
CANOPY				

The MOVE IT 45 SYSTEM is available as a recessed, surface-mounted and suspended version. The suspended indirect version also offers the option of additional indirect light for pleasant ceiling illumination. In addition, certain system insets ensure glare-free light for concentrated, efficient work at VDU workstations with an optimum UGR value of < 19. The power-track system is operated with 48V. Each system inset can be individually controlled and dimmed with a DALI signal.

MOUNTING TYPE	M26A Surface / Suspended	M26T Recessed Trimless	M26R Recessed Trim	M26E Recessed Trimless
ADAPTING PIECE				
L Connector				
T Connector				
X Connector				
POWER FEEDER UNIT				
082102.M26L01				
082102.M26L02				
CONNECTOR SET				
082102.M26L03				
082102.M26L04				
END CAPS				
082102.M26L05-A				
082102.M26L05-B				
CEILING FASTENER				
082102.M26L06				
CABLE SUSPENSION				
082102.M26L07				
CANOPY				
082102.M26L08				

MAGNETO TRACK 26A

Surface / Suspended System

TECHNICAL DETAILS

IP-Rated	20
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
Electrical	1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE

COLOUR

BK

ADAPTER

SPOTLIGHT INSETS

GRAPHIC LIGHT INSETS

GRILLE



MAGNETO TRACK 26A Suspended indirect

*Order installation track, light insets+ mounting accessories separately

	CODE	SIZE(L)	DIRECTION
	M26A	1000mm	Channel
	M26A	2000mm	Channel
	M26A	3000mm	Channel

ACCESSORIES

	CODE	SIZE(L)	DIRECTION
	M26AV90	100x100mm	Channel corner* V90°
	M26AH90	100x100mm	Channel corner* H90°
	M26AE90	100x100mm	Channel corner* E90°
	M26A +90	77x77mm	+ Connector* 90°
	M26A T90	180x77x77mm	T Connector* 90°




48 V

converter built-in track supply 220-240V AC,48V,50-60Hz,
ENEC approved, incl.feeder cable 2000mm

MAGNETO TRACK 26T

Trimless System

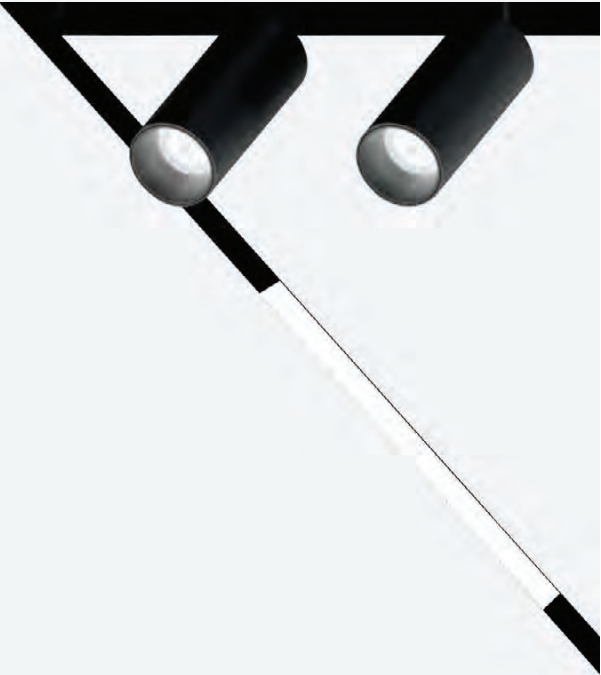

TECHNICAL DETAILS

IP-Rated	20
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
Electrical	1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE

COLOUR

BK 

ADAPTER

 SPOTLIGHT INSETS


 GRAPHIC LIGHT INSETS

 GRILLE



MAGNETO TRACK 26T Trimless

*Order installation track, light insets+ mounting accessories separately

	CODE	SIZE(L)	DIRECTION
	M26T	1000mm	Channel
	M26T	2000mm	Channel
	M26T	3000mm	Channel

ACCESSORIES

	CODE	SIZE(L)	DIRECTION
	M26TV90	100x100mm	Channel corner* V90°
	M26TH90	100x100mm	Channel corner* H90°
	M26TE90	100x100mm	Channel corner* E90°
	M26T+90	77x77mm	+ Connector* 90°
	M26T T90	180x77x77mm	T Connector* 90°

 SINGLE



48 V

converter built-in track supply 220-240V AC,48V,50-60Hz,
ENEC approved, incl.feeder cable 2000mm

MAGNETO TRACK 26R

Trim System



TECHNICAL DETAILS

IP-Rated	20
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
Electrical	1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE

COLOUR

BK

ADAPTER



SPOTLIGHT INSETS



GRAPHIC LIGHT INSETS




GRILLE



MAGNETO TRACK 26R Trim

*Order installation track, light insets+ mounting accessories separately

	CODE	SIZE(L)	DIRECTION
	M26R	1000mm	Channel
	M26R	2000mm	Channel
	M26R	3000mm	Channel

ACCESSORIES

	CODE	SIZE(L)	DIRECTION
	M26RV90	100x100mm	Channel corner* V90°
	M26RH90	100x100mm	Channel corner*H90°
	M26RE90	100x100mm	Channel corner* E90°
	M26R +90	77x77mm	+ Connector* 90°
	M26R T90	180x77x77mm	T Connector* 90°



48 V

converter built-in track supply 220-240V AC,48V,50-60Hz,
ENEC approved, incl.feeder cable 2000mm

MAGNETO TRACK 26E

Trimless System

TECHNICAL DETAILS


IP-Rated	20
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
Electrical	1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE

COLOUR

BK	☒
WH	☐

ADAPTER

	SPOTLIGHT INSETS
	GRAPHIC LIGHT INSETS
	GRILLE



MAGNETO TRACK 26E Trimless

*Order installation track, light insets+ mounting accessories separately



CODE	SIZE(L)	DIRECTION
M26E	1000mm	Channel
M26E	2000mm	Channel
M26E	3000mm	Channel

ACCESSORIES

CODE	SIZE(L)	DIRECTION
M26EV90	100x100mm	Channel corner* V90°
M26EH90	100x100mm	Channel corner*H90°
M26EE90	100x100mm	Channel corner* E90°
M26E +90	77x77mm	+ Connector* 90°
M26E T90	180x77x77mm	T Connector* 90°





48 V

converter built-in track supply 220-240V AC,48V,50-60Hz,
ENEC approved, incl.feeder cable 2000mm

**MAGNETO TRACK 26T Trimless
SPOTLIGHT INSETS**

**MAGNETO TRACK 26T Trimless
SPOTLIGHT INSETS**

**MAGNETO TRACK 26R Trim
GRAPHIC LIGHT**

**MAGNETO TRACK 26R Trim
SUSPENDED**



FLEXIBLE MAGNETIC ATTACHMENT

magnets make life simple

Different insets are held in place by magnetic force along the entire track. No tools are needed to install them. Rotate, slide into any position, and adjust at any time all it takes is one hand movement to highlight objects according to requirements.

MAGNETO SPOTLIGHT

Suitable for track 26A/ 26T/ 26R/ 26E

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	●
WH	○
BK+GD	●
WH+GD	●

CCT


2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

082102-8A01

SMD Spotlight



Power	3W
Beam Angle	10° / 15° / 30° / 36°
Flux	48lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+




082102-1A01

COB Spotlight



Power	8W
Beam Angle	15° / 23° / 36° / 60°
Flux	57lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+




082102-1A02

COB Spotlight



Power	2x8W
Beam Angle	15° / 23° / 36° / 60°
Flux	56lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+




082102-2A01

COB Spotlight



Power	12W
Beam Angle	7° / 15° / 23° / 36° / 60°
Flux	87lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+




082102-2A02

COB Spotlight




Power	2x12W
Beam Angle	7° / 15° / 23° / 36° / 60°
Flux	76lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



MAGNETO SPOTLIGHT

Suitable for track 26A/ 26T/ 26R/ 26E

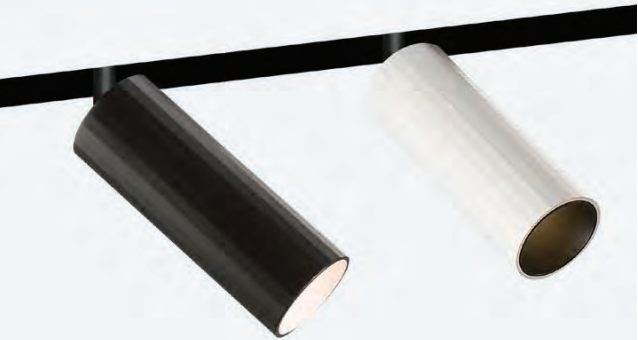

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT


2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

082102-2B01

COB Spotlight



Power	12W
Beam Angle	7° / 15° / 23° / 36° / 60°
Flux	87lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+




082102-2B02

COB Spotlight



Power	2x12W
Beam Angle	7° / 15° / 23° / 36° / 60°
Flux	76lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



MAGNETO SPOTLIGHT

Suitable for track 26A/ 26T/ 26R/ 26E



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	●
WH	○
BK+GD	●
WH+GD	●

CCT


2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

082102-3A01

COB Spotlight



Power	15W
Beam Angle	15°/23°/ 36°/ 60°
Flux	52lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+




082102-3B01

COB Spotlight



Power	15W
Beam Angle	15°-36°/ 36°- 60°
Flux	77lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+




082102-6A01

COB Spotlight



Power	25W
Beam Angle	15°/23°/ 36°/ 60°
Flux	102lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+




082102-6B01

COB Spotlight



Power	25W
Beam Angle	15° - 36°/ 36°- 60°
Flux	86lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+



MAGNETO SPOTLIGHT

Suitable for track 26A/ 26T/ 26R/ 26E



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT


2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

082102-5A01

COB Spotlight



Power	20W
Beam Angle	15°/23°/ 36°/ 60°
Flux	100lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+




082102-5B01

COB Spotlight



Power	20W
Beam Angle	WALLWASHER
Flux	42lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+



MAGNETO SPOTLIGHT

Suitable for track 26A/ 26T/ 26R/ 26E

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT


2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

082102-7A06

SMD Spotlight



Power	10W
Beam Angle	18°/ 23°/ 35°
Flux	95lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRl(Ra)	90+




082102-7A12

SMD Spotlight



Power	20W
Beam Angle	18°/ 23°/ 35°
Flux	99lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRl(Ra)	90+




082102-7B06

SMD Spotlight



Power	10W
Beam Angle	112°
Flux	50lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRl(Ra)	90+




082102-7B12

SMD Spotlight



Power	20W
Beam Angle	112°
Flux	45lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRl(Ra)	90+



MAGNETO GRILLE

Suitable for track 26A/ 26T/ 26R/ 26E



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT


2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

082102-21A06

SMD Spotlight



Power	10W
Beam Angle	18°/23°/ 35°
Flux	83lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+




082102-21A12

SMD Spotlight



Power	20W
Beam Angle	18°/23°/ 35°
Flux	85lm/W
CCT	2700K / 3000K / 3500K / 4000K /2700K-6000K
CRI(Ra)	90+



MAGNETO GRAPHIC

Suitable for track
26A/ 26T/ 26R/ 26E



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK 

CCT

3000K  6000K 
4000K  3000K-6000K 

082102-22A03

SMD Graphic light



Power	10W
Beam Angle	112°
Flux	61lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	90+

082102-22A06

SMD Graphic light



Power	20W
Beam Angle	112°
Flux	65lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	90+

082102-22A09

SMD Graphic light




Power	30W
Beam Angle	112°
Flux	66lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	90+

082102-22A12

SMD Graphic light



Power	40W
Beam Angle	112°
Flux	59lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	90+

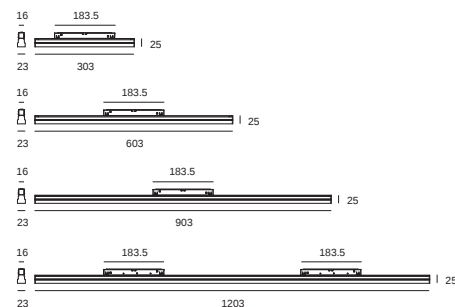



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

3000K	☒
-------	----------------------------------

082102-34A01

LED Suspended



Power	3W
Beam Angle	112°
Flux	50lm/W
CCT	3000K
CRI(Ra)	87+



MAGNETO SUSPENDED

Suitable for track 26A/ 26T/ 26R/ 26E



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	●
WH	○
GD	●
CR	●

CCT

2700K	●	3500K	●	3000K-6000K
3000K	●	4000K	●	

MAGNETO SUSPENDED


Suitable for track 26A/ 26T/ 26R/ 26E

082102-35A01

SMD Suspended



Power	6W
Beam Angle	150°
Flux	80lm/W
CCT	2700K / 3000K / 3500K / 4000K / 3000K-6000K
CRI(Ra)	90+




082102-35A02

SMD Suspended



Power	10W
Beam Angle	150°
Flux	96lm/W
CCT	2700K / 3000K / 3500K / 4000K / 3000K-6000K
CRI(Ra)	90+




082102-35A03

SMD Suspended



Power	12W
Beam Angle	150°
Flux	90lm/W
CCT	2700K / 3000K / 3500K / 4000K / 3000K-6000K
CRI(Ra)	90+





TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK+GD	
WH+BK	

CCT


2700K		3500K		2700K-6000K	
3000K		4000K			

082102-36A01

COB Suspended



Power	20W
Beam Angle	15°/23°/36°/60°
Flux	90lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



MAGNETO SUSPENDED

Suitable for track 26A/ 26T/ 26R/ 26E



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	●
WH	○
RD	●
GN	●
BU	●
YL	●

CCT

2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

MAGNETO SUSPENDED


Suitable for track 26A/ 26T/ 26R/ 26E

082102-32A33

COB Suspended



Power	10W
Beam Angle	15°/23°/36°
Flux	94lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+
Color	




082102-32B33

COB Suspended



Power	10W
Beam Angle	15°/23°/36°
Flux	94lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+
Color	



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.0/1-10V 3.DALI 4.BLE 5.ZIGBEE	

COLOUR

BK	●
WH	○
GD	●

CCT


2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

082102-33A20

COB Suspended



Power	12W
Beam Angle	15°/23°/36°
Flux	78lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+




082102-33A30

COB Suspended




Power	15W
Beam Angle	15°/23°/36°
Flux	74lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+




MAGNETO SUSPENDED

Suitable for track 26A/ 26T/ 26R/ 26E

Ceiling & Recessed

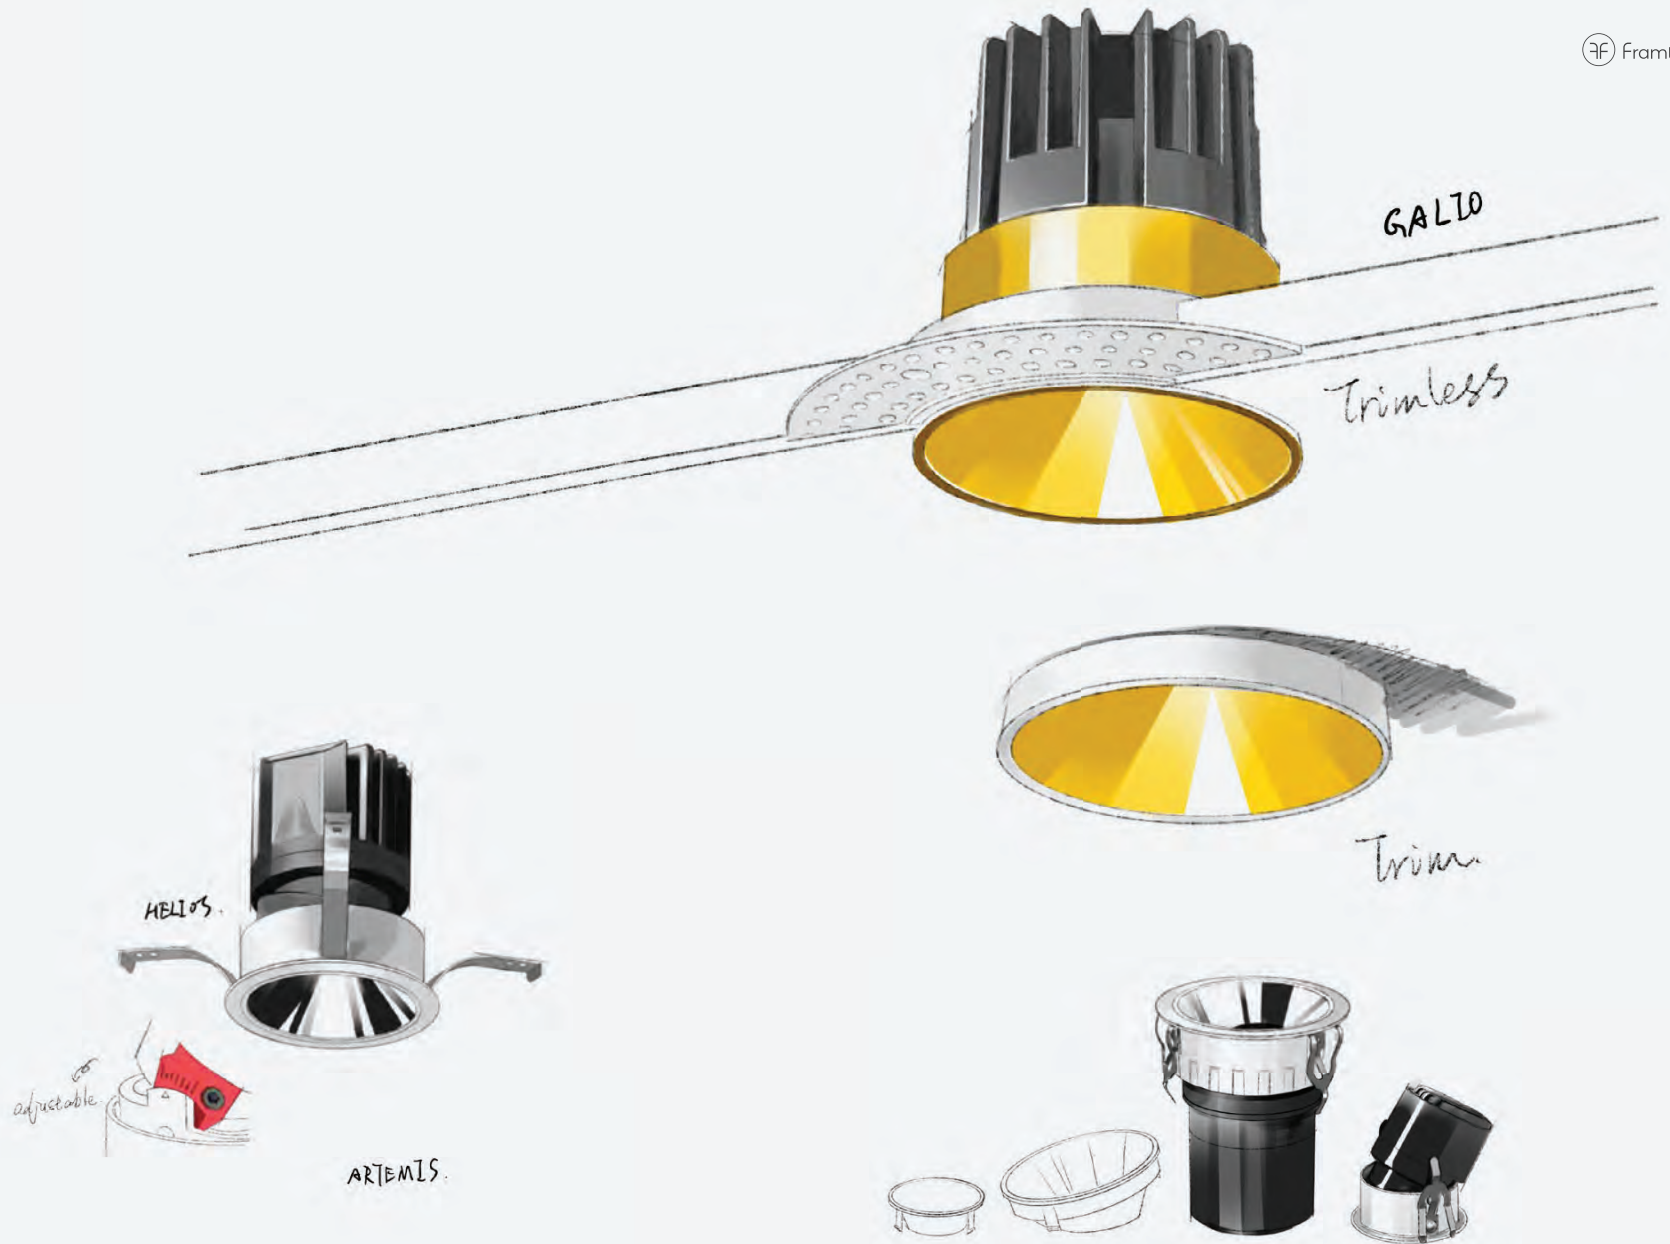

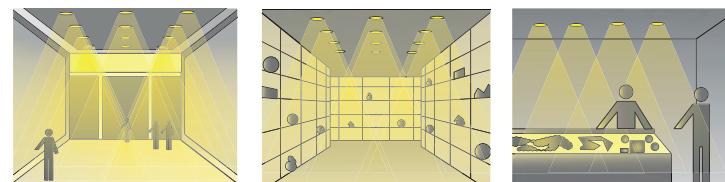

Application

Suitable for hotels, senior clubs, villas, offices, shopping malls and other lighting places.

HELIOS IP65

Innovative super comfortable light distribution technology combined with directional calculus optical design, with a shading angle up to 41° structure layout, to achieve $UGR < 10$;

A variety of beam angles of 8°, 18°, 28°, 38°, 50° are available to meet various space lighting needs. Providing convenient replacement of the honeycomb and a variety of light control accessories to achieve diversified light demand.

Types



IP44 Downlight



IP44 Downlight





HELIOS IP65

Precise dimming structure



Spring plungers ball point set screw slot design, more accurate scale.




Easy angle adjustment to solve the problem of multi-directional irradiation.

HELIOS IP65 PRO

Professional dimming structure


355°
Arbitrary horizontal rotation

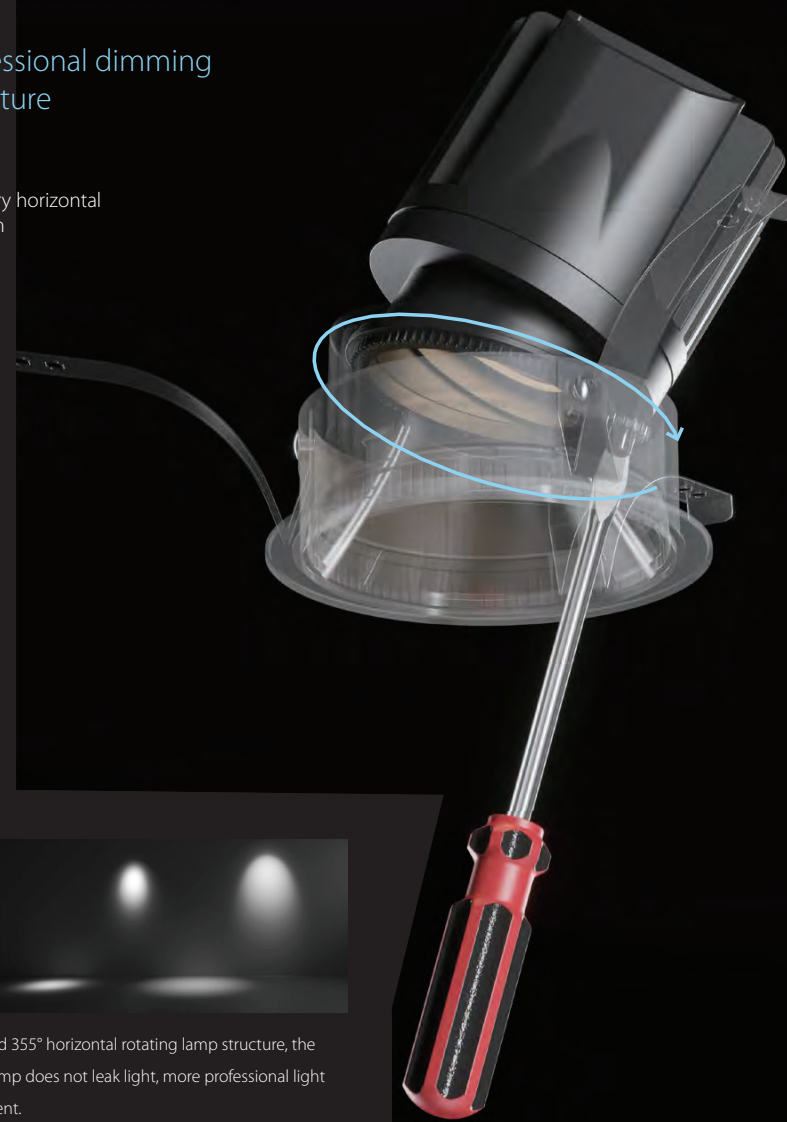


Unlimited 355° horizontal rotating lamp structure, the whole lamp does not leak light, more professional light adjustment.

Optional


Interchangeable modular design for projects maintenance and flexibility. Optional interchangeable reflector includes darklight reflector, pinhole, scallop wallwasher reflector for different lighting requirements.




Straight Light



Small Round Hole



Elliptical Hole





Snoot

UGR<16

Dark light technology



Optical reflective cup

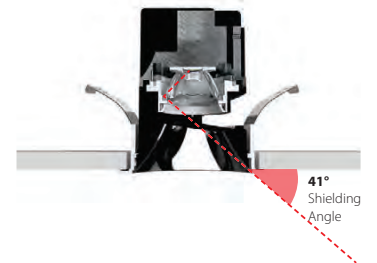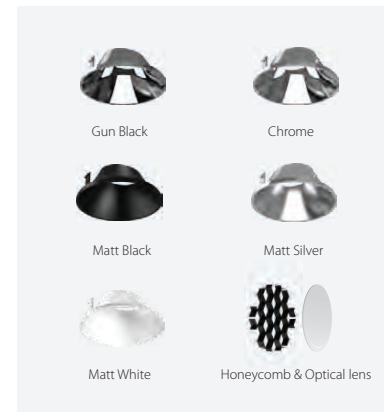

Deep reflective cup, UGR<16 to lengthen the distance between the light source and the light outlet, improve the anti-glare performance, the light through the reflective cup and anti-glare honeycomb filter, effectively reduce the excess light beam

HELIOS IP65

LED recessed ceiling downlight



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

TYPES

Trim	☒
Trimless	☐

COLOUR

BK	☒
WH	☐

CCT

2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

ACCESSORIES

Clear	☒
Frosted lens	☐
Honeycomb louver	☐

OPTIONS

			
Gun Black	Chrome	Matt silver	Matt white
			
Matt black	Round hole	Oval hole	Snoot

082101- 8A02


COB Trimless



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	φ75mm
CRI(Ra)	90+

082101- 8B02

COB Trimless



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (mm)	φ75mm
CRI(Ra)	90+



HELIOS IP65

LED recessed ceiling luminaires with adjustable light



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

2700K	3500K	2700K-6000K
3000K	4000K	

ACCESSORIES


Clear	☒
Frosted lens	☐
Honeycomb louver	☐

OPTIONS

		
Gun Black	Chrome	Matt silver
		
Matt white	Matt black	

082101-8A02-1


COB Trim



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	75x75mm
CRI(Ra)	90+

082101-8A02-2


COB Trim



Power	2x8W / 2x10W / 2x12W / 2x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	148x75mm
CRI(Ra)	90+

082101-8A02-3


COB Trim



Power	3x8W / 3x10W / 3x12W / 3x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	218x75mm
CRI(Ra)	90+

082101-8A02-4

COB Trim



Power	4x8W / 4x10W / 4x12W / 4x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	288x75mm
CRI(Ra)	90+



HELIOS IP65

LED recessed ceiling luminaires with adjustable light



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	

1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE

COLOUR

BK	☒
WH	☐

CCT

2700K	3500K	2700K-6000K
3000K	4000K	

ACCESSORIES


Clear	☒
Frosted lens	☐
Honeycomb louver	☐

OPTIONS

		
Gun Black	Chrome	Matt silver
		
Matt white	Matt black	

082101-8B02-1


COB Trimless



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	75x75mm
CRI(Ra)	90+

082101-8B02-2


COB Trimless



Power	2x8W / 2x10W / 2x12W / 2x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	148x75mm
CRI(Ra)	90+

082101-8B02-3


COB Trimless



Power	3x8W / 3x10W / 3x12W / 3x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	218x75mm
CRI(Ra)	90+

082101-8B02-4

COB Trimless



Power	4x8W / 4x10W / 4x12W / 4x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	288x75mm
CRI(Ra)	90+



HELIOS IP65 PRO

LED recessed ceiling downlight

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐


CCT

2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	


ACCESSORIES

Clear	☒
Frosted lens	☐
Honeycomb louver	☐

Optional Accessories



OPTIONS



082101-9A02


COB Trim



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	ø75mm
CRI(Ra)	90+

082101-9B02

COB Trimless



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (mm)	ø75mm
CRI(Ra)	90+



HELIOS IP65 PRO

LED recessed ceiling luminaires with adjustable light



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

ACCESSORIES


Clear	☒
Frosted lens	☐
Honeycomb louver	☐

OPTIONS

		
Gun Black	Chrome	Matt silver
		
Matt white	Matt black	

082101-9A02-1


COB Trim



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	75x75mm
CRI(Ra)	90+

082101-9A02-2


COB Trim



Power	2x8W / 2x10W / 2x12W / 2x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	148x75mm
CRI(Ra)	90+

082101-9A02-3


COB Trim



Power	3x8W / 3x10W / 3x12W / 3x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	218x75mm
CRI(Ra)	90+

082101-9A02-4

COB Trim



Power	4x8W / 4x10W / 4x12W / 4x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	288x75mm
CRI(Ra)	90+



HELIOS IP65 PRO

LED recessed ceiling luminaires with adjustable light



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

2700K	3500K	2700K-6000K
3000K	4000K	

ACCESSORIES


Clear	☒
Frosted lens	☐
Honeycomb louver	☐

OPTIONS

		
Gun Black	Chrome	Matt silver
		
Matt white	Matt black	

082101-9B02-1


COB Trimless



Power	8W/10W/12W/15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	75x75mm
CRI(Ra)	90+

082101-9B02-2


COB Trimless



Power	2x8W / 2x10W / 2x12W / 2x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	148x75mm
CRI(Ra)	90+

082101-9B02-3


COB Trimless



Power	3x8W / 3x10W / 3x12W / 3x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	218x75mm
CRI(Ra)	90+

082101-9B02-4

COB Trimless



Power	4x8W / 4x10W / 4x12W / 4x15W
Beam Angle	8°/18°/28°/38°/50°
Flux	70lm/W
Cut Out (Mm)	288x75mm
CRI(Ra)	90+





GALIO

Ceiling Light


The unique narrow side face ring design breaks through the traditional way of expression. Rich color matching, to meet the various theme space applications. 30° shading Angle design, UGR<6, to provide you with more comfortable lighting space. Various dimming control schemes are available with dimming accuracy up to 0.1%.



Type



Trim



Trimless

Beams



Narrow **15°**



Medium wide **25°**



Wide **38°**



Extremely wide **50°**

GALIO

Recessed



TECHNICAL DETAILS


Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

GD	
BK	
WH	


CCT

2700K		3500K		2700K-6000K
3000K		4000K		



082109-B01

 Fixed	
Power	8W / 10W
Beam Angle	15°/25°/38°/50°
Flux	84 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+
Colors Option	 black  white  white+silver  white+black
	 white+rose gold  white+gold  white+red



082109-C01

 Fixed	
Power	8W / 10W
Beam Angle	15°/25°/38°/50°
Flux	84 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+
Colors Option	 black  white  gold

