

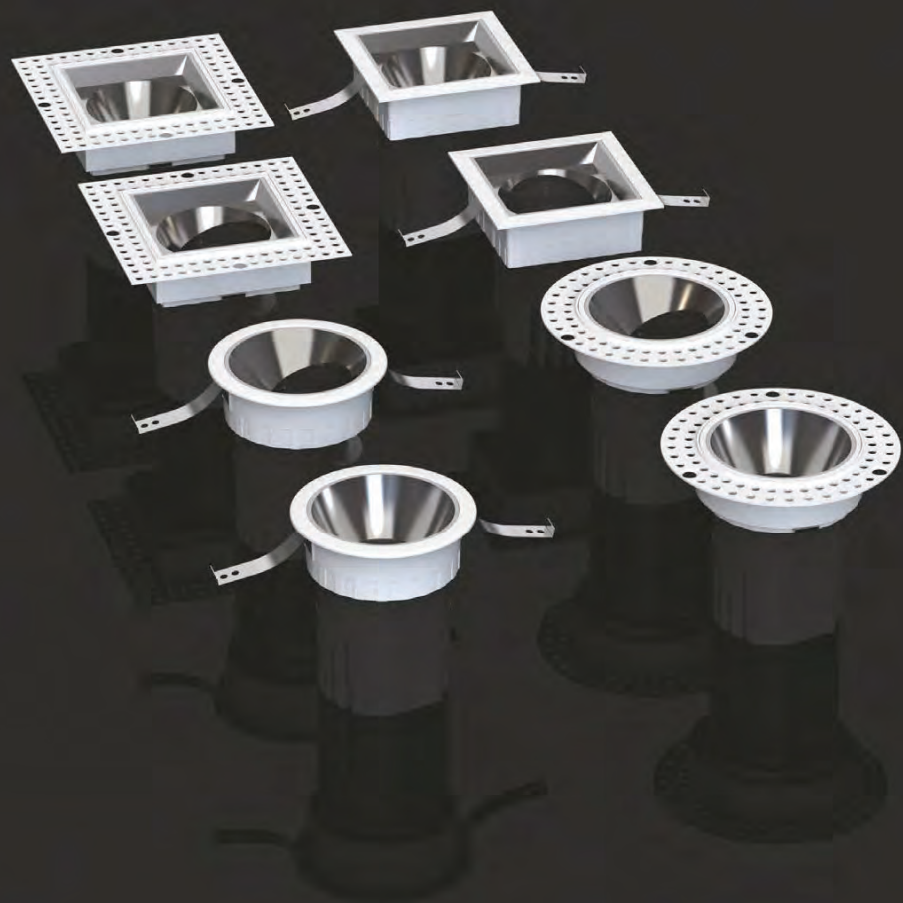


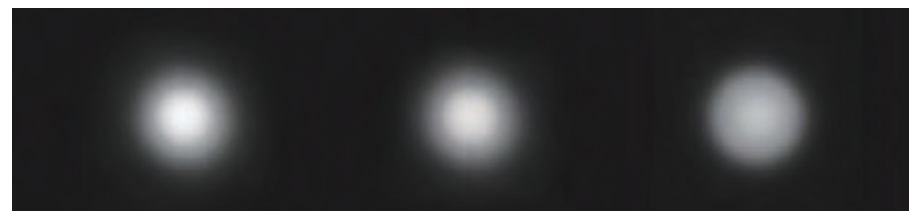

ARTEMIS

Recessed

30° shading Angle design, UGR<6, to provide you with more comfortable lighting space. Various dimming control schemes are available with dimming accuracy up to 0.1%.

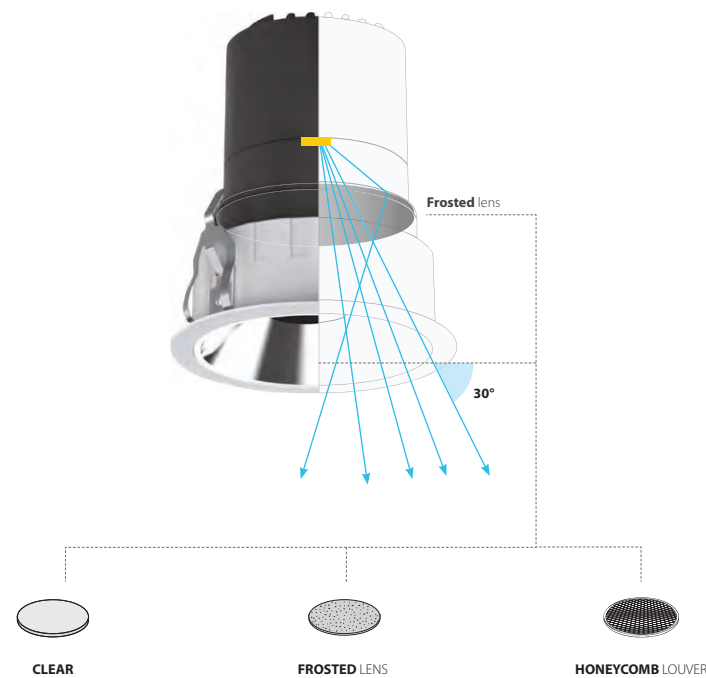

ARTEMIS

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR


GBK	●
CR	●
MSLV	●
MWH	○
MBK	●
GD	●

CCT

2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

ACCESSORIES



Clear	●
Frosted lens	●
Honeycomb louver	●



082113-A01

COB Adjustable



Power	6W
Beam Angle	15°/23°/36°/50°
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-A02R

COB Fixed



Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°/Wallwasher
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-A02S

COB Fixed



Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°/Wallwasher
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-B02R

COB Adjustable


Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-B02S

COB Adjustable

Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°
Flux	82 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



ARTEMIS-Trimless

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR


GBK	●
CR	●
MSLV	●
MWH	○
MBK	●
GD	●

CCT

2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

ACCESSORIES



Clear	●
Frosted lens	●
Honeycomb louvre	●



082113-C02R

C0B Fixed



Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50° / Wallwasher
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-C02S

C0B Fixed



Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°/Wallwasher
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-D02R

C0B Adjustable


Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-D02S

C0B Adjustable

Power	8W / 10W / 12W
Beam Angle	15°/23°/36°/50°
Flux	71 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



ARTEMIS-Pro

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR


GBK	●
CR	●
MSLV	●
MWH	○
MBK	●
GD	●

CCT

2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

ACCESSORIES



Clear	●
Frosted lens	●
Honeycomb louver	●



082113-A03R

C0B Fixed


Power	15W / 20W
Beam Angle	15°/23°/36°/50° / Wallwasher
Flux	90 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-B03R

C0B Adjustable


Power	15W / 20W
Beam Angle	15°/23°/36°/50°
Flux	84 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-A04R

C0B Fixed

Power	25W / 30W / 35W
Beam Angle	15°/23°/36°/50°
Flux	83 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082113-B04R

C0B Adjustable

Power	25W / 30W / 35W
Beam Angle	15°/23°/36°/50°
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



REVEN II

Down Light



Ø 87mm



Ø 100mm



Ø 135mm



Ø 165mm



Ø 187mm



Chrome



Matt silver



Chrome+
Honeycomb




Sandy silver+
Honeycomb




DIRECT ILLUMINATION

- A. Embedded COB light source, avoid looking at the light source directly
- B. Die-cast aluminium radiator
- C. A variety of reflector and accessories combinations can be better used in different places

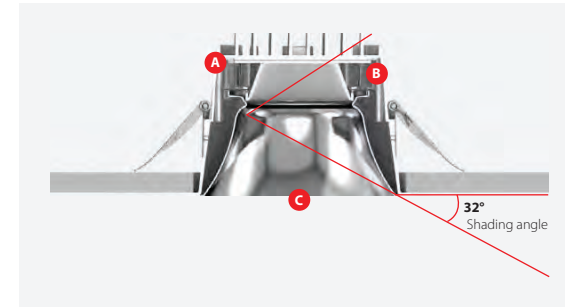

TRIPLE REFLECTORS

- A. Embedded COB light source, avoid looking at the light source directly
- B. Die-cast aluminium radiator
- C. Bright silver+triple anti-glare reflector, unique design for more effective anti-glare effect

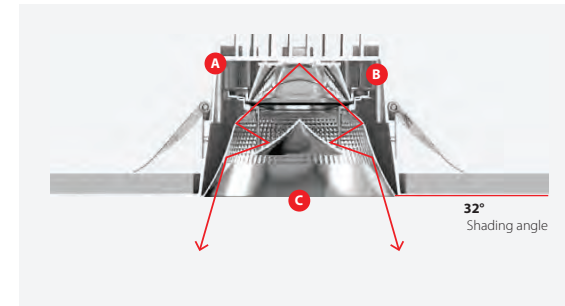

REVEN II

Recessed

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH+CR	☐
WH+MSLV	☐
WH+SSLV	☐

CCT

2700K	☐	3500K	☐
3000K	☐	4000K	☐

ACCESSORIES

Honeycomb louver	☐
Enlarged ring	☐

CE	CB	TUV	IP 20
----	----	-----	-------

220V	240V
------	------

082143-A01

COB Fixed



Power	10W
Beam Angle	50°
Flux	88 lm/W
CCT	2700K / 3000K / 3500K / 4000K/2700K-6000K
CRI(Ra)	90+

082143-A02

COB Fixed



Power	15W
Beam Angle	50°
Flux	83 lm/W
CCT	2700K / 3000K / 3500K / 4000K/2700K-6000K
CRI(Ra)	90+

082143-A03

COB Fixed



Power	25W
Beam Angle	50°
Flux	86 lm/W
CCT	2700K / 3000K / 3500K / 4000K/2700K-6000K
CRI(Ra)	90+

082143-A04

COB Fixed



Power	35W
Beam Angle	50°
Flux	85 lm/W
CCT	2700K / 3000K / 3500K / 4000K/2700K-6000K
CRI(Ra)	90+

082143-A05

COB Fixed



Power	45W
Beam Angle	50°
Flux	89 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

HADES

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~-50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH	☐
BK	☒

CCT

2700K	3500K	2700K-6000K
3000K	4000K	

Tunable white					
IP 20	30°	355°	UGR<19	220V	240V



082107-A01

COB Adjustable



Power	10W / 12W
Beam Angle	12°/22°/27°/36°/50°
Flux	58 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082107-B01

COB Adjustable



Power	10W / 12W
Beam Angle	12°/22°/27°/36°/50°
Flux	58 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

PIN

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~-50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH	
WH+BK	
WH+GD	
WH+RD	
WH+SLV	


CCT

2700K		3500K	
3000K		4000K	

220V
240V


UGR<19

082110-A01




Power	3W
Beam Angle	12°/20°
Flux	51 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082110-A02



Power	6W / 8W
Beam Angle	15°/23°/36°
Flux	67 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082110-A03



Power	10W / 12W
Beam Angle	15°/23°/36°
Flux	71 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

BAI

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

White+black	
White+gold	
White+silver	
Round	
Oval	

CCT

2700K		3500K		2700K-6000K	
3000K		4000K			

CE	CB	TUV			IP 20
220V 240V	 UGR<19	20°			



082112-A01


COB Adjustable Reflector



Power	8W / 10W
Beam Angle	15°/23°/36°
Flux	64 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082112-B01

COB Adjustable Lens



Power	8W / 10W
Beam Angle	15°/23°/36°/50°
Flux	64 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

BROW

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~-50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium / PC
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH	☐
BK	☒

CCT

2700K	☒	3500K	☒
3000K	☒	4000K	☒

CECBTUV



IP 20


220V
240V

UGR<19



082115-A01


COB Wall washer



Power	6W / 8W / 10W
Beam Angle	Wall washer
Flux	59 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082115-A02

COB Wall washer



Power	15W
Beam Angle	Wall washer
Flux	69 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

NESSO

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH

CCT



Tunable white



082114-B01


COB Adjustable



Power	6W / 8W / 10W
Beam Angle	15°/23°/36°
Flux	60 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082114-B02


COB Adjustable



Power	12W / 15W
Beam Angle	15°/23°/36°
Flux	70 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

STARK

Recessed

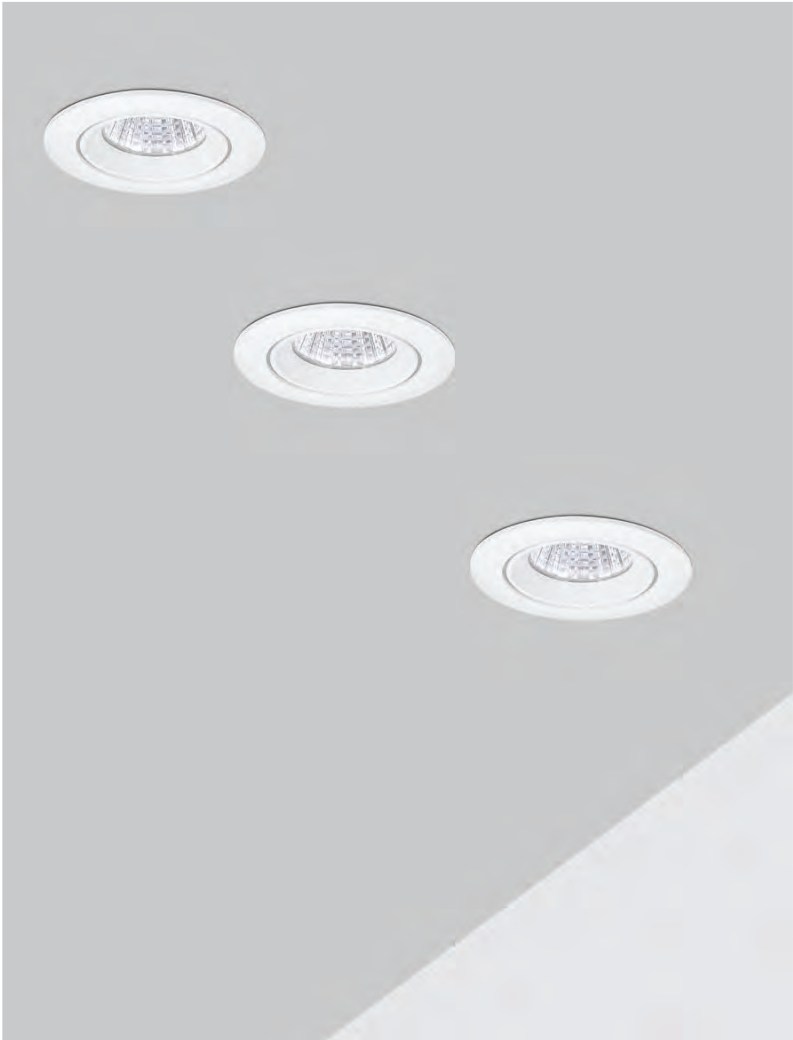

TECHNICAL DETAILS

Operating Temperature	-25~-50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH

CCT

2700K		3500K	
3000K		4000K	

220V
240V

UGR<19

30°

082108-A01

Adjustable

LED light source

- Use high-quality high-finger chips Ra≥90,SDCMs5
- No red UV radiation, less heat emission

Professional reflector professional lens

- Precise angle, perfect light control

Good heat dissipation

- Die-casting radiator, fast heat dissipation
- Large tail-dissipation area increases air convection


Face ring design

- Deep anti-glare design to create a good lighting environment

Easy to install

- Snap-in mounting design, simple and convenient, no auxiliary tools



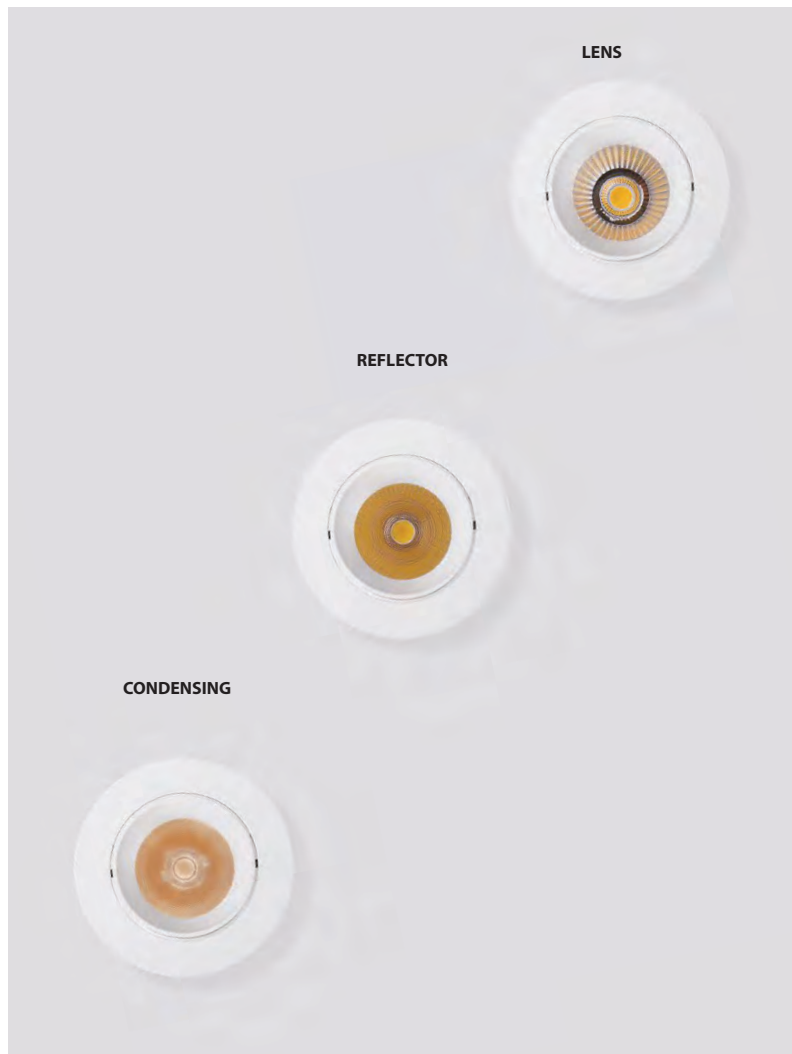

NAMI

Recessed

The unique narrow side face ring design breaks through the traditional way of expression. Rich color matching, to meet the various theme space applications. 30° shading Angle design, UGR<6, to provide you with more comfortable lighting space. Various dimming control schemes are available with dimming accuracy up to 0.1%.



Type



Reflector



Lens



Condensing

Beams



Narrow 15°



Medium wide 23°



Wide 36°



Extremely wide 60°

NAMI

Recessed



TECHNICAL DETAILS



Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH

CCT

2700K		3500K	
3000K		4000K	

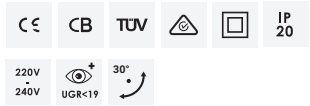

082111-A01

C0B Adjustable

Power	5W / 7W
Beam Angle	15°/23°/36°/60°
Flux	90 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



Reflector



082111-A02

C0B Adjustable

Power	8W / 10W
Beam Angle	15°/23°/36°
Flux	69 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



Reflector



082111-B01

C0B Adjustable

Power	5W / 7W
Beam Angle	10°/20°/30°
Flux	90 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



Lens



082111-B02

C0B Adjustable

Power	8W / 10W
Beam Angle	10°/20°/30°
Flux	69 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



Lens



082111-C02

SMD Adjustable

Power	5W / 10W
Beam Angle	5°/8°
Flux	34 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



Condensing





DOT

Recessed

LED CHIP

International famous brand,high luminous led light source,CRI>90, no red ultraviolet radiation. lower heat dissipation.reducing the damage for the color of the commodity and materials during light heating.

HEAT DISSIPATION


Use high quality die casting Aluminium light body,integrating heat dissipation structures.high efficiency for heat dissipation.

SMALL HOLE

Mini hole size 32mm.small and good looking. almost no limitations for the holding plates. widely used in shop and cabinet keep the showing cabinet beautiful.

EASY INSTALLATION.

Bullet plate installation design simple and easy.no other tools.

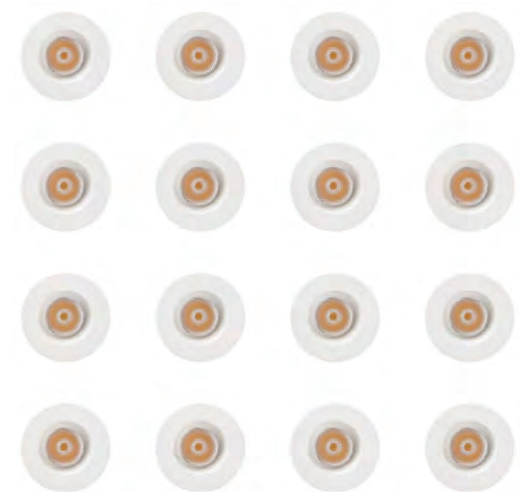

DOT

Recessed



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH	
WH+BK	

CCT

2700K		3500K	
3000K		4000K	

082106-A01

SMD Fixed



Power	3W
Beam Angle	12°/20°
Flux	52lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082106-B01

SMD Adjustable



Power	3W
Beam Angle	12°/20°
Flux	54lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+




082106-C01

SMD Fixed



Power	3W
Beam Angle	12°/20°
Flux	54lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+
Colors	





MIZ

Down Light


Light Shadow technology thanks to its cut-off of 40 degrees, maximum integration with architecture combines with the impeccable, defined beam of light and total shielding, which allows it to be placed almost in zenithally position with no glare.



Mode



Flat



Mediate



Ultra

Beams



Floodlight 90°



Floodlight 100°

MIZ-Flat

Down Light

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH 

CCT



082118-A01

SMD Fixed



Power	3W/ 5W
Beam Angle	100°
Flux	84 lm/W
CCT	3000K / 4000K / 6000K
CRI(Ra)	85+



082118-A02

SMD Fixed



Power	7W / 10W
Beam Angle	100°
Flux	91 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-A020

SMD Fixed



Power	10W/ 12W
Beam Angle	100°
Flux	89 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-A03

SMD Fixed



Power	12W/ 15W
Beam Angle	100°
Flux	93 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



Ultra-thin lamp body, height only
39-40.5mm, suitable for home, shopping malls,
office and other places.



MIZ-Flat

Down Light



082118-A04	
SMD Fixed	
Power	15W/ 20W
Beam Angle	100°
Flux	95 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-A05	
SMD Fixed	
Power	20W / 25W
Beam Angle	100°
Flux	100 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-A06	
SMD Fixed	
Power	30W/ 35W
Beam Angle	100°
Flux	100 lm/W
CCT	3000K / 4000K / 6000K
CRI(Ra)	85+



MIZ-Mediate

Down Light



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH

CCT



082118-B01

SMD Fixed



Power	3W/ 5W
Beam Angle	100°
Flux	79 lm/W
CCT	3000K / 4000K / 6000K
CRI(Ra)	85+



082118-B02

SMD Fixed



Power	7W / 10W
Beam Angle	100°
Flux	83 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-B020

SMD Fixed



Power	10W/ 12W
Beam Angle	100°
Flux	92 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-B03

SMD Fixed



Power	12W/ 15W
Beam Angle	100°
Flux	95 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+




Ultra-thin lamp body, height only 44-47mm, suitable for home, shopping malls, office and other places.



MIZ-Mediate

Down Light




082118-B04

SMD Fixed



Power	15W/ 20W
Beam Angle	100°
Flux	93 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+




082118-B05

SMD Fixed



Power	20W / 25W
Beam Angle	100°
Flux	100 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-B06

SMD Fixed



Power	30W/ 35W
Beam Angle	100°
Flux	115 lm/W
CCT	3000K / 4000K / 6000K
CRI(Ra)	85+



MIZ-Ultra

Down Light

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	
WH	
WH+GD	
WH+RD	
WH+BK	
WH+SLV	

CCT

3000K		4000K		3000K - 6000K
6000K				

ACCESSORIES

Light Guide Plate	
-------------------	---



High light transmittance PMMA mask new light guide panel, soft light is not dazzling



082118-C01

SMD Fixed



Power	3W / 5W
Beam Angle	90°
Flux	63 lm/W
CCT	3000K / 4000K / 6000K
CRI(Ra)	85+



082118-C02

SMD Fixed



Power	7W / 10W
Beam Angle	90°
Flux	75 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-C020

SMD Fixed



Power	10W / 12W
Beam Angle	90°
Flux	85 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



082118-C03

SMD Fixed



Power	12W / 15W
Beam Angle	90°
Flux	90 lm/W
CCT	3000K / 4000K / 6000K / 3000K-6000K
CRI(Ra)	85+



MIZ-Ultra

Down Light



082118-C04

SMD Fixed

Ø145

Power

15W/ 20W

Beam Angle

90°

Flux

90 lm/W

CCT

3000K / 4000K / 6000K / 3000K-6000K

CRI(Ra)

85+

082118-C05

SMD Fixed

Ø160

Power

20W / 25W

Beam Angle

90°

Flux

90 lm/W

CCT

3000K / 4000K / 6000K / 3000K-6000K

CRI(Ra)

85+

082118-C06

SMD Fixed

Ø200

Power

30W/ 35W

Beam Angle

90°

Flux

93 lm/W

CCT

3000K / 4000K / 6000K

CRI(Ra)



85+

LATIO

Recessed Spotlight


Usually used in the exhibition place for basic lighting and important lighting. For a simple and fashionable design style and widely used in clothes shop, furniture shop, leisure place, business centre etc.

Types

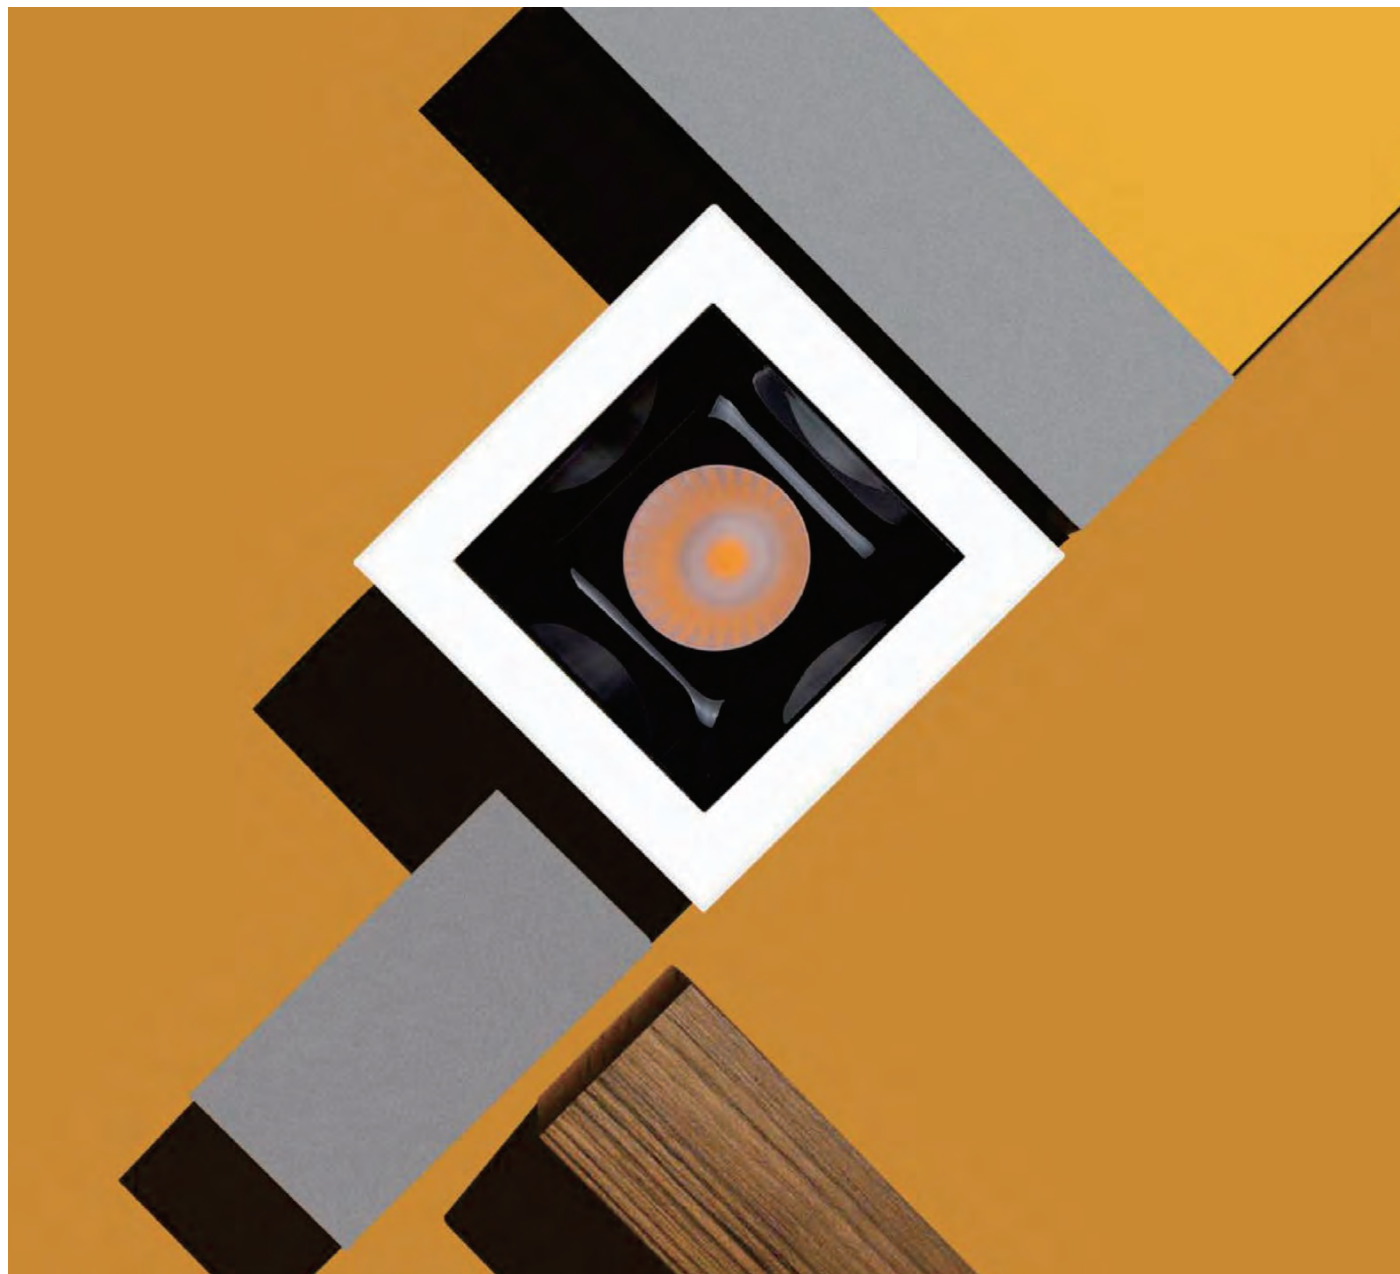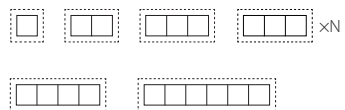


LATIO

Trim or trimless, single, double, triple or continuous.
Unit is our Recessed Spotlight, able to integrate
precision and performance optics, designed to be
flexible, powerful and subtle.

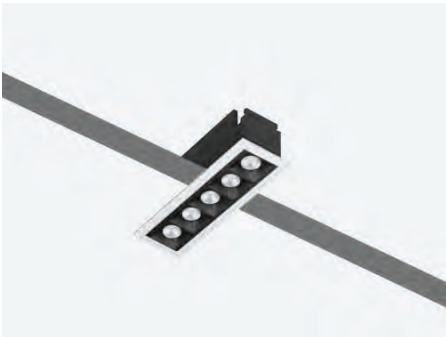


LATIO Trim
Recessed Spotlight

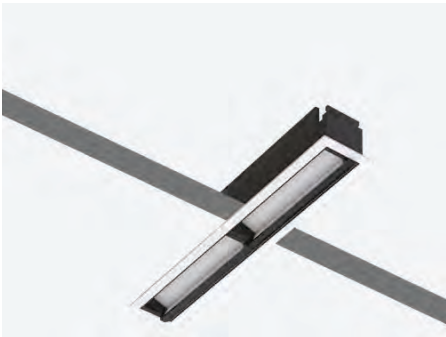


LATIO Wallwasher
Linear Spot



LATIO Trimless
Recessed Spotlight

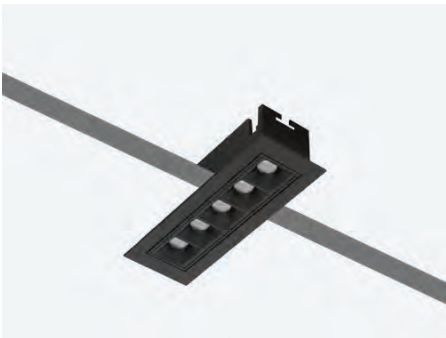

LATIO Adjustable
Recessed Spotlight




Accessories

Unit has a wide range of lenses so it can be adapted to
meet any number of lighting design needs.




FROSTED LENS



SQUARE SPREAD LENS



RECTANGLE SPREAD LENS



Reflective Finishes



Chrome



Rose Gold



Gold



Dark chrome



Matt Black



Matt White

LATIO Trim

Recessed Spotlight

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium / ABS+PC
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	
WH	

CCT

2700K		3500K		2700K-6000K	
3000K		4000K			



082103-A01

SMD Trim



Power	2W
Beam Angle	22° / 36° / 45°
Flux	50lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082103-A02

SMD Trim



Power	4W
Beam Angle	22° / 36° / 45°
Flux	60lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082103-A03

SMD Trim



Power	6W
Beam Angle	22° / 36° / 45°
Flux	62lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082103-A05

SMD Trim



Power	10W
Beam Angle	22° / 36° / 45°
Flux	73lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082103-A10

SMD Trim



Power	20W
Beam Angle	22° / 36° / 45°
Flux	79lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082103-A15

SMD Trim



Power	30W
Beam Angle	22° / 36° / 45°
Flux	79lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



LATIO Wallwasher

Linear Spotlight

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium / ABS+PC
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	●
WH	○

CCT

2700K	●	3500K	●	2700K-6000K
3000K	●	4000K	●	

082103-A05-1


SMD Trim



Power	10W
Beam Angle	wallwasher
Flux	43lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K / RGBW
CRI(Ra)	90+

082103-A10-1


SMD Trim



Power	20W
Beam Angle	wallwasher
Flux	48lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K / RGBW
CRI(Ra)	90+

082103-A15-1

SMD Trim




Power	30W
Beam Angle	wallwasher
Flux	50lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K / RGBW
CRI(Ra)	90+



LATIO Trimless

Recessed Spotlight

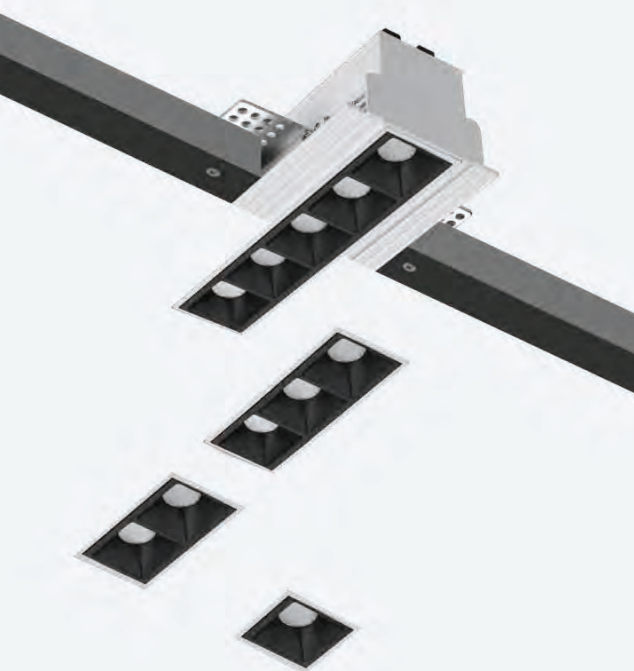

TECHNICAL DETAILS


Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium / ABS+PC
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	



082103-B02

SMD Trimless



Power	4W
Beam Angle	22°/36°/45°
Flux	50lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082103-B03


SMD Trimless



Power	6W
Beam Angle	22°/36°/45°
Flux	62lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082103-B05


SMD Trimless



Power	10W
Beam Angle	22°/36°/45°
Flux	73lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082103-B10


SMD Trimless



Power	20W
Beam Angle	22° / 36° / 45°
Flux	79lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082103-B15

SMD Trimless



Power	30W
Beam Angle	22° / 36° / 45°
Flux	79lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

LATIO Adjustable

Recessed Spotlight

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium / ABS+PC
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	
WH	

CCT

2700K		3500K		2700K-6000K
3000K		4000K		

CE	CB	TUV			30°
IP 20	220V 240V		UGR<19		

082103-C01

SMD Adjustable



Power	2W
Beam Angle	22°/36°/45°
Flux	50lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082103-C02

SMD Adjustable



Power	4W
Beam Angle	22°/36°/45°
Flux	60lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082103-C03

SMD Adjustable



Power	6W
Beam Angle	22°/36°/45°
Flux	62lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082103-C05


SMD Adjustable



Power	10W
Beam Angle	22° / 36° / 45°
Flux	73lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082103-C10


SMD Adjustable



Power	20W
Beam Angle	22° / 36° / 45°
Flux	79lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082103-C15

SMD Adjustable



Power	30W
Beam Angle	22° / 36° / 45°
Flux	79lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

MO

Recessed Spotlight


Usually used in the exhibition place for basic lighting and important lighting. For a simple and fashionable design style and widely used in clothes shop, furniture shop, leisure place, business centre etc.

Types





Light Shadow technology thanks to its cut-off of 40 degrees, maximum integration with architecture combines with the impeccable, defined beam of light and total shielding, which allows it to be placed almost in zenithally position with no glare.




Modality



Unit Square 1X



Unit Square 2X



Unit Square 3X

Beams



Very narrow 15°



Narrow 23°




Medium 36°

Adjustability



356°

Vertical rotation



0° 35°

Horizontal rotation

LED chip



COB chip

MO Adjustable
Recessed Spotlight



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

2700K	☒	3500K	☒
3000K	☒	4000K	☒



082104-A01

COB Adjustable




Power	6W
Beam Angle	15°/23°/36°
Flux	80lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082104-A02

COB Adjustable




Power	2x6W
Beam Angle	15°/23°/36°
Flux	67lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082104-A03

COB Adjustable



Power	3x6W
Beam Angle	15°/23°/36°
Flux	67lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082104-B01

COB Adjustable




Power	8W / 10W / 12W
Beam Angle	15°/23°/36°
Flux	80lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082104-B02

COB Adjustable



Power	2x8W / 2x10W / 2x12W
Beam Angle	15° / 23° / 36°
Flux	67lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082104-B03

COB Adjustable



Power	3x8W / 3x10W / 3x12W
Beam Angle	15° / 23° / 36°
Flux	67lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+





WISE I

Recessed Spotlight

Light Shadow technology thanks to its cut-off of 40 degrees, maximum integration with architecture combines with the impeccable, defined beam of light and total shielding, which allows it to be placed almost in zenithally position with no glare.



Trim 20Wx2



Trim 20Wx1



Trimless 20Wx2




Trimless 20Wx1

Adjustability



Vertical rotation



Horizontal rotation

Beams



Narrow 15°



Medium wide 25°




Wide 38°



Extremely wide 60°

WISE I Adjustable

Recessed Spotlight

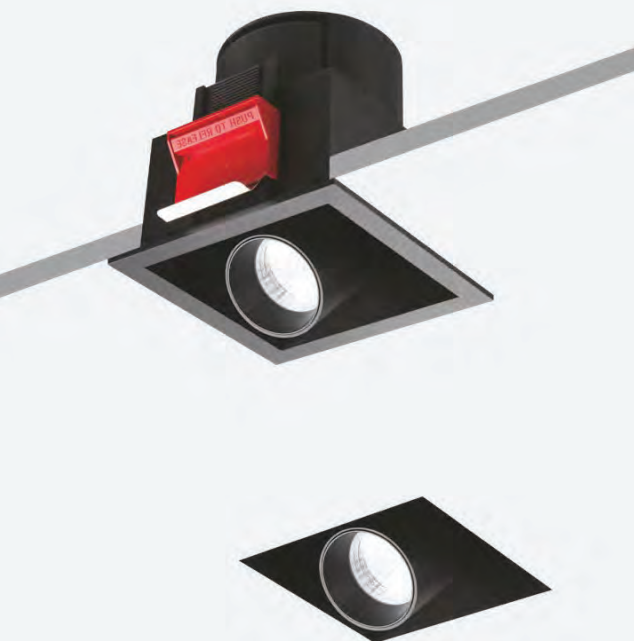

TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

BK	☒
WH	☐

CCT

2700K	☒	3500K	☒	2700K-6000K
3000K	☒	4000K	☒	

082105-A01(Trim)

COB Adjustable



Power	20W
Beam Angle	15°/25°/38°/50°
Flux	75lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082105-A02(Trim)

COB Adjustable



Power	2x20W
Beam Angle	15°/25°/38°/50°
Flux	77lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082105-A01(Trimless)

COB Adjustable



Power	20W
Beam Angle	15°/25°/38°/50°
Flux	75lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082105-A02(Trimless)

COB Adjustable



Power	2x20W
Beam Angle	15°/25°/38°/50°
Flux	77lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+





WISE II

Recessed Spotlight

Light Shadow technology thanks to its cut-off of 40 degrees, maximum integration with architecture combines with the impeccable, defined beam of light and total shielding, which allows it to be placed almost in zenithally position with no glare.



Trim **10W**



Trimless **10W**



Round **10W**




Square **10Wx1**




Square **10Wx2**

Mode



Vertical slide for the projector
To move out smoothly



Adjustable up to 355° and tilting
up to 90° with block system

Beams



Narrow
15°



Medium wide
23°/25°



Wide
36°/38°



Extremely wide
50°/60°

WISE II

Recessed Spotlight



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR


WH ☐

CCT

2700K	☐	3500K	☐
3000K	☐	4000K	☐

ACCESSORIES

Honeycomb ☐



082117-A01

C0B Adjustable



Power	10W / 12W
Beam Angle	15°/25°/38°/50°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+

082117-A02

C0B Adjustable



Power	25W / 30W
Beam Angle	15°/23°/36°/60°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



WISE II

Recessed Spotlight



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH ☐

CCT

2700K	3500K
3000K	4000K


ACCESSORIES

Honeycomb ☐



082117-B01

COB Adjustable	
Power	10W/ 12W
Beam Angle	15°/25°/38°/50°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082117-B02

COB Adjustable	
Power	25W / 30W
Beam Angle	15°/23°/36°/60°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



WISE II

Recessed Spotlight



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR


WH ☐

CCT

2700K	3500K	2700K-6000K
3000K	4000K	

ACCESSORIES

Honeycomb ☐




082117-C01

COB Adjustable



Power	10W / 12W
Beam Angle	15°/25°/38°/50°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082117-C02

COB Adjustable



Power	2x10W / 2x12W
Beam Angle	15°/23°/38°/60°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+



082117-D01

COB Adjustable



Power	10W / 12W
Beam Angle	15°/25°/38°/50°
Flux	80 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 2700K-6000K
CRI(Ra)	90+





ARC

Recessed Spotlight

Series design to meet various lighting requirements;


Lamp horizontal direction 355 degrees, vertical direction 55° adjustment Angle;

Telescopic lamp body design to meet higher lighting needs;

Integrated lamp structure, good heat dissipation effect, effectively prolong the life of lamps.



Type



Ø95

Ø110

Ø134.5

Ø165

Beams



Narrow 15°

Medium wide 25°

Wide 38°

Extremely wide 60°

ARC

Recessed Spotlight



TECHNICAL DETAILS

Operating Temperature	-25~50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH	☐
BK	☒

CCT

2700K	☒	3500K	☒
3000K	☒	4000K	☒



082116-A01

C0B Adjustable



Power	12W
Beam Angle	15°/25°/38°/60°
Flux	73 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+




082116-A02

C0B Adjustable



Power	15W
Beam Angle	15°/25°/38°/60°
Flux	85 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082116-A03

C0B Adjustable



Power	20W / 25W / 28W
Beam Angle	15°/25°/38°/60°
Flux	88 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+



082116-A04

C0B Adjustable



Power	32W / 36W
Beam Angle	15°/25°/38°/60°
Flux	92 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

LEVER

Recessed adjustable spot light



Up and down stretchable, maximum stretch to 490mm.
Rotation angle to 360°, maximum tilt angle to 45°.
Classic black and white colors available , more colors
can be customized.

TECHNICAL DETAILS

Operating Temperature	-25~-50°C
Lifetime	35,000-50,000H LM80
MATERIAL	Aluminium
OPTIONS	
1.Non-DIM 2.TRIAC 3.0/1-10V 4.DALI 5.BLE 6.ZIGBEE	

COLOUR

WH	☐
BK	☒


CCT

2700K	☒	3500K	☒
3000K	☒	4000K	☒



082125-B16

SMD Adjustable



Power	10W
Beam Angle	18°/30°
Flux	40 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082125-B35

SMD Adjustable



Power	10W
Beam Angle	18°/30°
Flux	40 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+

082125-B55

SMD Adjustable



Power	10W
Beam Angle	18°/30°
Flux	55 lm/W
CCT	2700K / 3000K / 3500K / 4000K
CRI(Ra)	90+